



SYNCRO - MAX[®]

Extra-wide Polyurethane Belts




Technology in Motion.

Elatech

ELATECH SYNCRO-MAX®

Syncro-Max

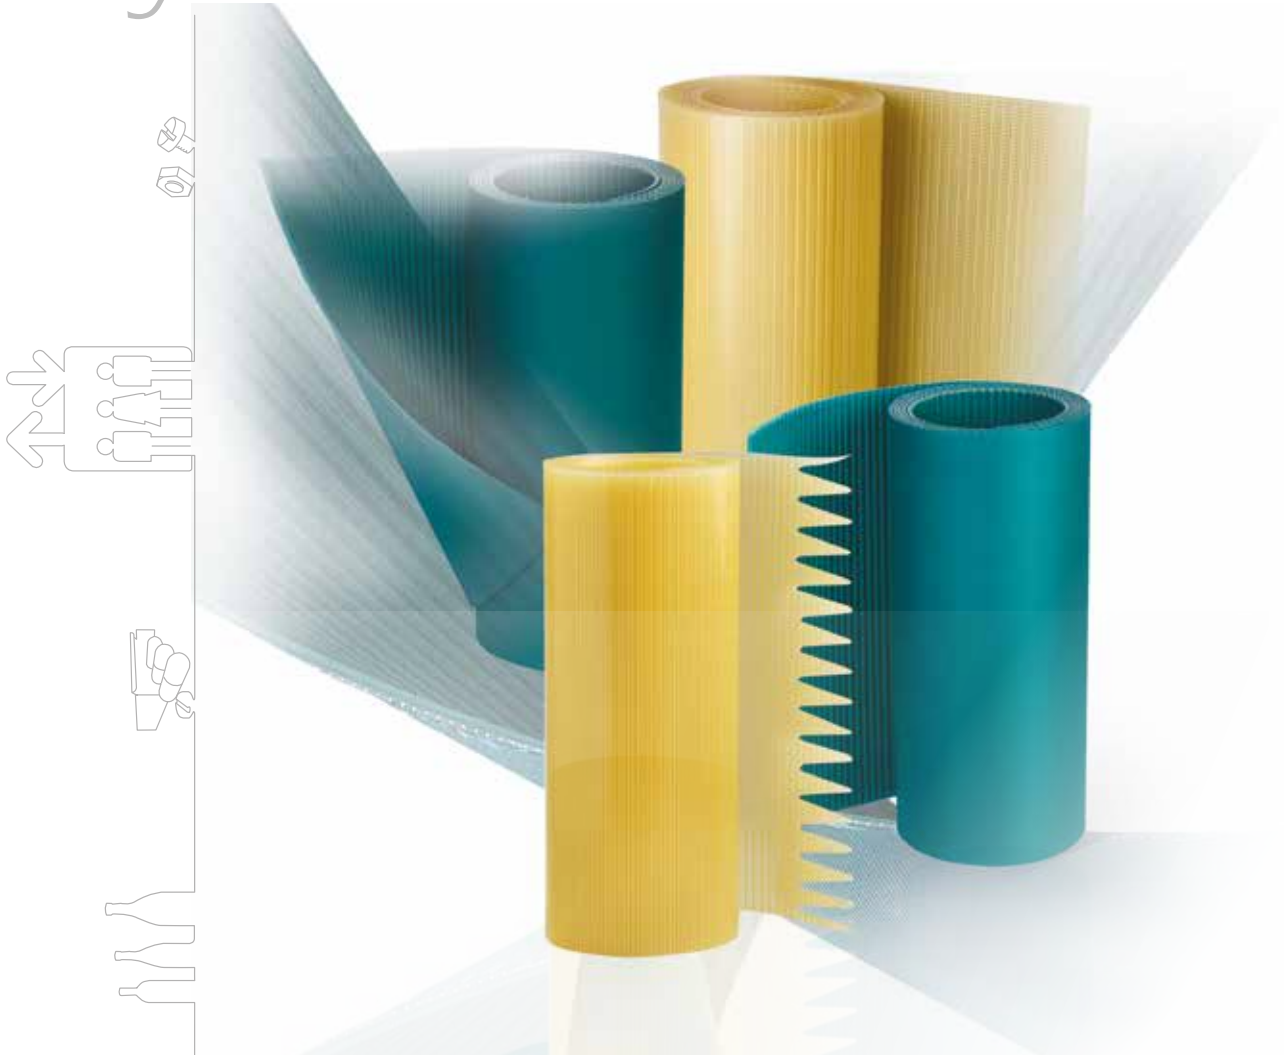


Extra-wide Polyurethane Belts

ELATECH® SYNCRO-MAX® Extra-wide Polyurethane Belts extend the advantages of synchronous timing belts to wider surfaces and to the typical applications of flat and modular conveyor belts.

Product Range

T 10	Width (mm)	H	Width (in)
	200		8
	250		10
	300		12
	350		14
	400		16
	450		18
	500 + 510		20

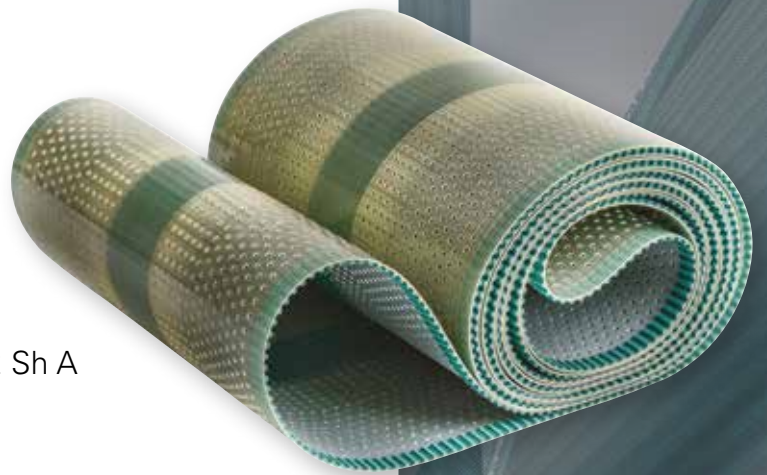

Product overview

- Natural colour PU compound material 92 Sh A
- High durability
- Cut resistant
- Grease, chemicals and water resistant
- Non-marking
- Kevlar (Aramid) parallel cord reinforcement
- No cords exposure on belt edges
- Even cord tension
- Available in open end and welded execution
- Standard roll length 50 m

Advantages

- Synchronous conveying = no slippage, better tracking, higher indexing precision
- Smaller drive pulley requirements, lower belt tension and lower shaft loads = power saving

Typical application

- Conveying, packaging, production of baby diapers / feminine hygiene items, tires production.





IB906-02/1 - 07/17 (500 - 07/17)



ELATECH S.R.L.

Via Fonte Solforosa, 1 - 24012 Val Brembilla (BG) - Italy

Tel. +39.0345330311 Fax +39.0345330330

www.elatech.com - info@elatech.com

